




ISO9001

Coating Thickness Gauge TT210



- Integrated probe FN
- Automatic substrate recognition
- Automatic calculation: Mean/Max/Min/No./S.Dev
- Upper-lower limit setting and sound alarm
- Data output RS232 to printer TA220S or PC
- 500 data can be stored
- Measurement modes: continuous/single
- 2 shutdown models: Manual/automatic

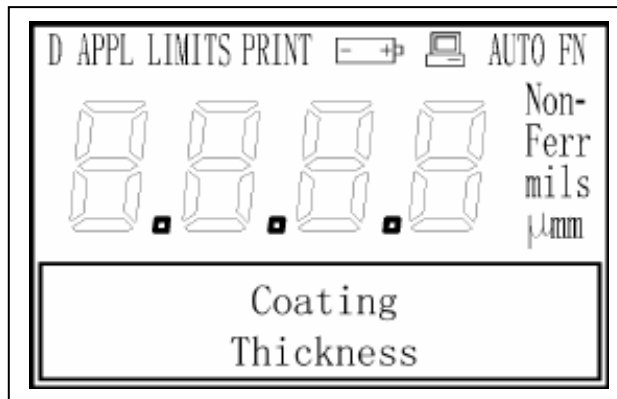

Technical specifications

Operating principle:	magnetic induction/eddy current
Measuring range:	0 to 1250 μ
Minimum resolution:	0.1 μ (coating thickness<100 μ)
Measuring accuracy:	F: $\pm(3\%H+1\mu)$ H=nominal value N: $\pm(3\%H+1.5\mu)$
Statistics	Average (MEAN), MAX., MIN. , number of measurements (NO.), standard deviation (S.Dev)
Power supply	Battery AA 1.5V (2pcs)
Display	Backlight
Dimensions (L×W×H)	110mm×50mm×23mm
Weight	100g

Standard delivery

Main unit	1
Calibration foil set	1
AA 1.5V battery	1
Waist pack for main unit	1
Instruction manual	1
TIME certificate	1
Warranty card	1
Carrying case	1

Optional accessories

Printer TA220S with cable



Printer TA220S



Supplied by:

Test and Measurement Instruments C.C.

Tel: 0027 (0)11 683 4365

www.instrumentsgroup.co.za